

Karakteristika sesalne enote po IEC 60312 Vacuum Cleaner Motor Performance in Accordance with IEC 60312


| | |
|--------------------------------|---------------------------------------|
| Oznake / Marking | |
| Napetost / Voltage: 120 [V] | Nazivna moč / Nominal power: 1600 [W] |
| Frekvenco / Frequency: 60 [Hz] | |

| Napetost | Premer odprtine | Tok | Vhodna moč | Vrtilna frekvenca | Podtlak | Pretok | Zračna moč | Izkoristek |
|----------|-----------------|---------|-------------|-------------------|---------|----------------------|------------|------------|
| Voltage | Orifice | Current | Input Power | Speed | Vacuum | Air Flow | Air Power | Efficiency |
| [V/Hz] | [mm] | [A] | [W] | [1/min] | [kPa] | [dm ³ /s] | [W] | [%] |
| 120/60 | 50 | 14,70 | 1722,13 | 41027 | 1,44 | 57,22 | 82,49 | 4,79 |
| 120/60 | 40 | 14,53 | 1701,33 | 41104 | 3,32 | 55,32 | 183,55 | 10,79 |
| 120/60 | 30 | 14,33 | 1680,64 | 41576 | 8,71 | 49,74 | 433,04 | 25,77 |
| 120/60 | 23 | 13,69 | 1609,16 | 42759 | 16,70 | 39,66 | 662,35 | 41,16 |
| 120/60 | 19 | 12,87 | 1516,50 | 44395 | 21,76 | 30,51 | 663,83 | 43,78 |
| 120/60 | 16 | 12,10 | 1429,73 | 46220 | 25,43 | 23,19 | 589,83 | 41,26 |
| 120/60 | 13 | 11,35 | 1345,53 | 48484 | 28,34 | 16,09 | 455,96 | 33,89 |
| 120/60 | 10 | 10,58 | 1257,93 | 51233 | 29,31 | 9,71 | 284,68 | 22,63 |
| 120/60 | 6,5 | 9,52 | 1135,06 | 54485 | 29,18 | 4,16 | 121,33 | 10,69 |
| 120/60 | 0 | 8,88 | 1061,75 | 58044 | 30,45 | 0,00 | 0,00 | 0,00 |

** Zahteve kupca / Customer Demands; ° Pomerjeno po 20s / Measured after 20 seconds

Mejne vrednosti / Guaranteed values

| | | | | | | |
|----|-------------------------------------|--------------------------------|---|------|---|-----|
| ** | Maksimalna moč / Maximal power: | P_{1max} [W] | = | 1700 | ± | 50 |
| | Srednja moč / Mean power: | P_{mmin} [W] | ≥ | 1360 | | |
| | Podtlak / Vacuum: | p_{max} [kPa] | = | 30,4 | ± | 1,5 |
| | Pretok pri φ 50 / Air Flow at φ 50: | Q_{450} [dm ³ /s] | = | 57 | ± | 3 |
| ** | Zračna moč / Air Power: | P_{2max} [W] | = | 660 | ± | 20 |
| | Izkoristek / Efficiency: | η_{max} [%] | = | 44 | ± | 2 |
| | Masa / Mass: | m [kg] | = | 1,28 | | |

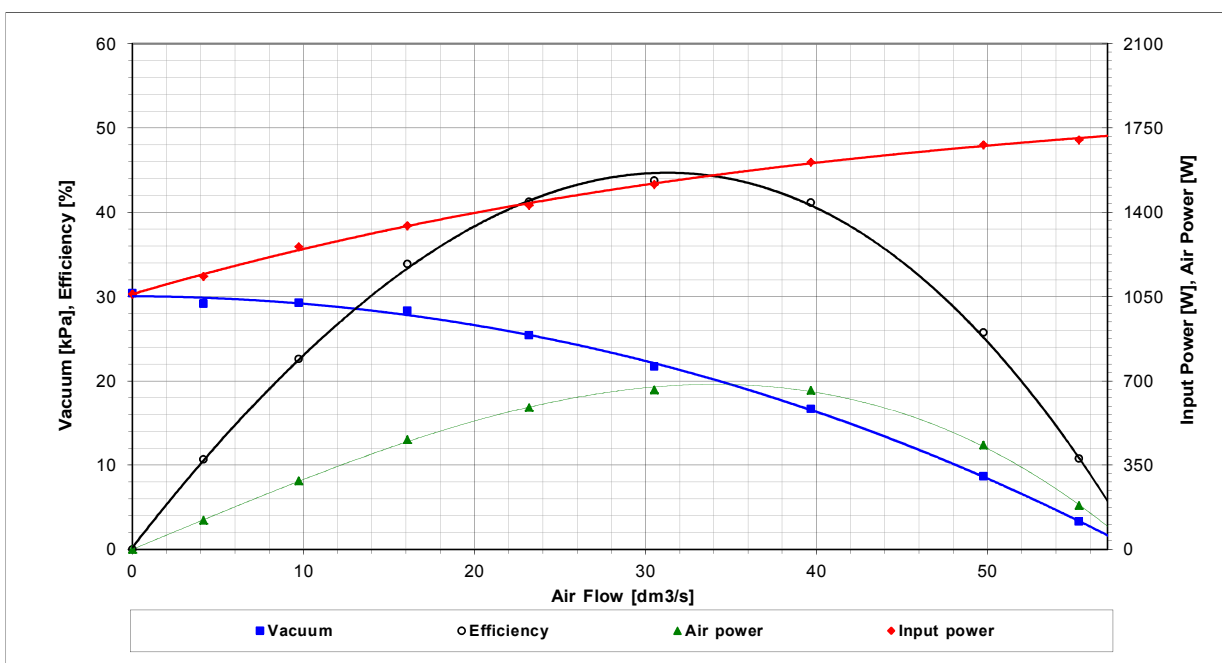

| | | | | | | | |
|------|---------------|-------|-----|-------------------------------------|-------|---------|--|
| | | | | | datum | ime | naziv |
| | | | | izdelal | | | KARAKTERISTIKA SESALNE ENOTE VACUUM CLEANER MOTOR PERFORMANCE |
| | | | | pregledal | | | |
| | | | | DOMEL® | | | koda |
| | | | | Otoki 21, 4228 Železniki, Slovenija | | | KA 463.3.606 |
| ozn. | št. obvestila | datum | ime | | | | pripadnost |
| | | | | | | | list 5 |
| | | | | | | | stran 1+ |
| | | | | | | namesto | |

